

# FUMEX<sup>®</sup>

## EXHAUST HOSE



### **Temperature and chemical resistant lightweight exhaust hose.**

These exhaust hoses are specially designed to be flexible with a low pressure drop. They are resistant to chemicals found in diesel and petroleum fumes and able to handle heavy air volumes. All models provide flexibility in small curve radiuses, excellent tensile strength and crack resistant.

*The Fumex range also includes fans, accessories and filters suitable for extractor points*

---

**EXTRACTOR POINT  
Pure advantage**

## AG



Flame-retardant, crush proof hose suitable for vehicle exhaust fumes. Heat-resistant rubberised fabric in EPDM/polyester. Coil in EPDM-coated polyester. For exhaust fume temperatures up to 170 °C. Hose lengths: 2.5–10 m

### Technical data

Dimensions Ø .....	75	100	125	150	200 mm	Hose length.....	2.5–10 m
Weight.....	0.6	0.9	1.1	1.3	1.7 kg/m	Temperature range ...	-40 °C – +170 °C

## AGT




Exhaust fume hose suitable for roof-based suspension. Heat-resistant rubberised fabric in EPDM/polyester. Coil in EPDM-coated steel. For exhaust fume temperatures up to 150 °C. Hose lengths: 2.5–10 m

### Technical data

Dimensions Ø .....	100	125	160	200 mm	Hose length.....	2.5–10 m
Weight.....	0.75	0.9	1.15	1.5 kg/m	Temperature range ...	-40 °C – +150 °C

## AGHT 300

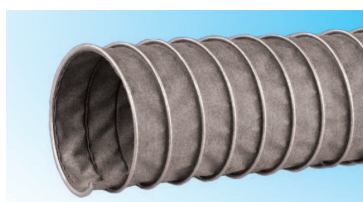

High-quality exhaust fume hose for extra high exhaust temperatures. Flame-retardant high temperature fabric with external, galvanised steel coil. For temperatures up to 300 °C. Hose length: 2.5–10 m

### Technical data

Dimensions Ø .....	75	100	125	150	200 mm	Hose length.....	2.5–10 m
Weight.....	0.6	0.9	1.0	1.2	1.6 kg/m	Temperature range ...	-60 °C – +300 °C

## AGHT 450




Flame-retardant, silicone-coated glass fibre fabric. Double ply with external, galvanised steel coil. For temperatures up to 450 °C. Hose length: 2.5–10 m

### Technical data

Dimensions Ø .....	75	100	125	150	200 mm	Hose length.....	2.5–10 m
Weight.....	1.0	1.3	1.4	1.8	2.3 kg/m	Temperature range ...	-60 °C – +450 °C

## AGHT 650

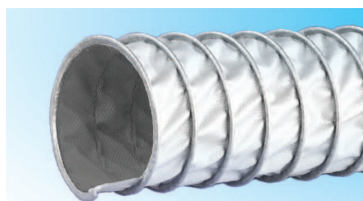

Flame-retardant PU-coated high temperature fabric, double ply. Reinforced with woven-in stainless steel wire. External, galvanised steel coil. For temperatures up to 650 °C. Hose length: 2.5–10 m

### Technical data

Dimensions Ø .....	75	100	125	150	200 mm	Hose length.....	2.5–10 m
Weight.....	1.65	1.8	2.1	2.2	3.0 kg/m	Temperature range ...	-60 °C – +650 °C

## AGS



Light and flexible silicone hose. Flame-retardant, silicone-coated glass fibre fabric with embedded steel spring coil. For temperatures up to 250 °C. Hose length: 4 m

### Technical data

Dimensions Ø .....	75	100	125	150	200 mm	Hose length.....	2.5–10 m
Weight.....	0.6	0.9	1.0	1.2	1.6 kg/m	Temperature range ...	-70 °C – +250 °C

## SG & SGC



SG

**SG** Hose clamps for fitting exhaust fume hoses suitable for AG, AGT and AGS

Dimensions Ø .....	75	100	125	150	200 mm
--------------------	----	-----	-----	-----	--------



SGC

**SGC** Hose clamps for fitting exhaust fume hoses suitable for AGHT

Dimensions Ø .....	75	100	125	150	200 mm
--------------------	----	-----	-----	-----	--------